

## Kururipper: Manual


### Specifications

**This cable stripper clips a cable and makes a notches around the outside covering to remove it.**

**Easy to use, just hold the cable and rotate the body.**

**Off-the-shelf cutter blades can be used as replacements.**

**Small and easy to carry to workplaces L 57mm xH 24mm xW 17mm)**

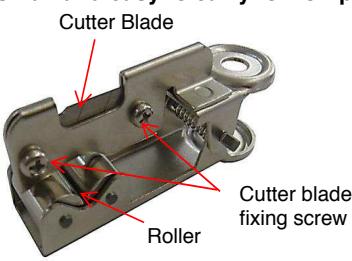

\* The image is SS.

Recommended Cable Diameter		Unit : mm)
Product Name	Recommended Cable Diameter	
Kururipper SS	3.2~ 5.0	
Kururipper SM	4.7~ 9.0	
Kururipper SL	5.0~ 10.0	

Reverse: SS and SM indicate their Product Names.

SL


SM

SS



### How to Use

1. Open Kururipper and hold the cable while placing the cutter blade in the direction to remove the cable jacket.
2. Rotate Kururipper once in the direction of the arrow (the direction to press) as shown below.  
(Do not rotate in the wrong direction or the notch will not be made correctly)
3. Remove the cable from Kururipper and remove the cable jacket. Make sure no damages on the core wires.

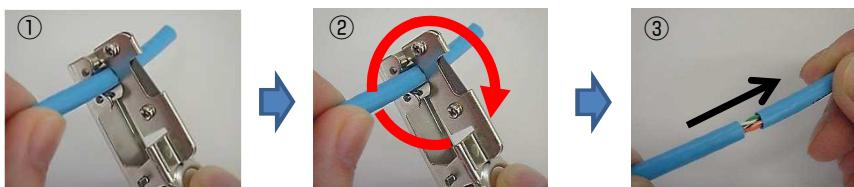


### How to Adjust Cutter Blade

Check and adjust Kururipper and the cable before use

1. Loosen the cutter blade fixing screws (2). \* Use a screwdriver for M2.5.
2. The cutter blades may move. Hold part A of the cutter blade using fingers to adjust the length of blade B.
3. Tighten the screws and remove the cable jacket. Check there is no damage to core wires.
4. Repeat from 1. if any damage is found to core wires.

2 Cutter blade fixing screws




The standard length of the blade is for a notch of the cable jacket, in which a thin layer remains.

### How to Change the Cutter Blade

Change the cutter blade if it is not sharp enough to make a notch on the cable jacket.

Use a standard size cutter blade for office use (9.0mm in width, 0.38mm in thickness). Cut the blade for 3 splits.

1. Loosen the cutter blade fixing screws (2).  
\* Use the driver for M2.5.
2. Remove the cutter blade from the main body of Kururipper.
3. Place the new cutter blade for 3 splits on Kururipper in an opposite direction to 2.

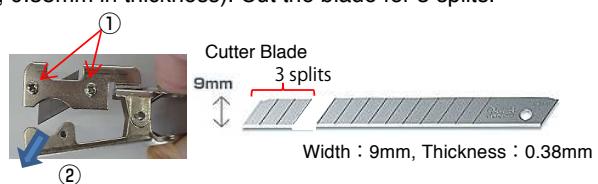

\* Be sure to adjust the position of the cutter blade after replacement.

### Notice



- Do not use Kururipper for live cables.
- There is risk of electric shock.
- Use the cutter blade with care to avoid injury.



- Do not use Kururipper for purposes not specified in the Specifications.
- There is a risk of damage to the main body.

Agent

Sales/Manufacturer :

Yamako Electric Manufacture CO., LTD.

4-6-20 Higashi-Koijya Ota-ku Tokyo 144-0033 Japan

TEL 03-5735-3311 FAX 03-5735-3330

<http://www.yamakodenki.co.jp/>